



Studio Command-H Fixture Quick Start

Follow these steps to set up your new Studio Command- H fixture:

Unpack

Unpack your Studio Command™ fixture and verify that it arrived undamaged. Inspect both the outside of the fixture for physical damage and the inside of the fixture for damage to glass components. To access the internal components, release the two bezel latches (one latch located on each side of the fixture's head) and remove the bezel.

If the fixture is damaged, notify both the shipping agent and your sales agent immediately. **Do not discard the shipping carton and packing materials.** The carton and packing materials are specifically designed to protect the product during transport. High End Systems assumes no responsibility for products that are damaged during transport. Always return a product for repair in its original shipping carton and packing materials.

Note: *Before sending anything to the factory, call your High End Systems dealer/distributor for a Return Material Authorization (RMA) number. The factory cannot accept any goods shipped without an RMA number.*

Install Attachment Plugs

You will need to install attachment plugs to the fixture power cord and the dimmer power cord. Because of the variety of attachment plugs used worldwide, High End Systems, Inc. cannot make specific recommendations for the particular plug you should use. Contact a local authority if you are unsure which type of attachment plug you need to obtain.

Note that the cores in the mains lead are colored according to the following code:

- green and yellow = earth
- blue = neutral
- brown = live



Warning: *Class 1 equipment - This equipment must be earthed.*

This equipment is designed for connection to a branch circuit having a maximum overload protection of 20 A.

Installing an Attachment Plug - U.K. Only


In the United Kingdom, the colours of the cores in the mains lead of this equipment may not correspond with the colored markings identifying the terminals in your plug. Therefore, install an attachment plug in accordance with the following code:

- The core which is coloured green and yellow must be connected to the plug terminal which is marked with the letter "E," or by the earth symbol \oplus , or coloured green, or green/yellow.
- The core which is coloured blue must be connected to the terminal which is marked with the letter "N" or coloured black.
- The core which is coloured brown must be connected to the terminal which is marked with the letter "L" or coloured red.

Vigtig Fikker Heds Information - Danmark

Advarsel: Beskyttelse mod elektrisk chock. \oplus eller \perp

Vigtigt! Lederne med gul/groen isolation maa kun tilsluttes en klemme maerket

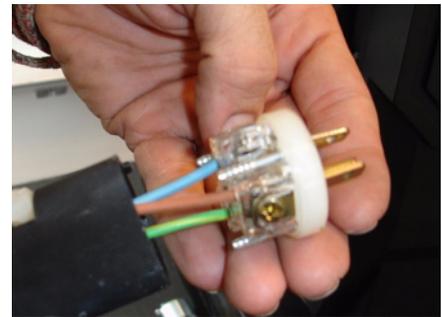

1 Install the attachment plug to the fixture power cord.



2 Install the attachment plug to the dimmer power cord.

Installing the Lamp

1. Tilt the fixture's head to access the lamp cap and using a wide tip, flat head screwdriver, loosen (*but do not remove*) the two lamp assembly screws.
2. Pull the lamp assembly straight out of the fixture. The lamp assembly is connected to the fixture by lamp socket wires. Support the lamp assembly while replacing the lamp. **Do not allow the lamp socket wires to support the weight of the lamp assembly.**
3. Remove all packaging materials from the new lamp. Holding the new lamp by its ceramic base, gently press the two base pins into the lamp socket until the lamp is firmly seated.

Caution: *When handling the new lamp, avoid contact with the lamp glass. If the lamp glass is soiled by oil or dirt from skin, gloves, etc., clean the cold lamp glass with an alcohol wipe. A soiled lamp could overheat and burst, causing damage to the fixture.*

4. Insert the lamp assembly straight into the fixture and re-tighten the lamp cover screws.

Caution: *Make sure the lamp socket wires are not wrapped around the lamp or crimped while reinserting the lamp assembly.*



1 Access the lamp socket.



2 Place lamp in socket.

Powering On the Fixture

Studio Command H fixtures do not have a power switch. To power on the fixture, simply connect it to an appropriately-rated power source.

Caution: *To preserve lamp life, reduce lamp power thru the dimmer rack controls while powering and homing the fixture. This will reduce voltage inrush to the lamp when the relay contacts close at the completion of the homing operation.*

When operating the luminaire with the lamp on, the head bezels must be installed for proper head cooling and temperature control.